




**Technical Features**

- › 3-way pressure compensator, spool-type, built in a modular block for vertical grouping with mounting interface acc. to ISO 4401 (size 10), DIN 24340 (CETOP 05)
- › High flow capacity
- › The valve maintains a constant pressure drop on a flow control valve (e.g. proportional directional control valve) and thus a constant volumetric flow independent of actuator load
- › Pressure sensing in the both pipelines of actuator with the help of integrated load shuttle valve (model C)
- › Rapid and smooth response to load changes
- › Stable function throughout the whole flow range
- › Precisely manufactured and hardened key parts
- › Pressure drop setting by adjusting screw in the range from 4 to 14 bar (58 – 203 PSI)
- › Possible external sensing of LS signal by means of an adapter, mounted instead the end plug with adjusting screw on the spring side
- › In the standard version, the valve housing is phosphated for basic surface corrosion protection and as preparation for painting. Steel parts are zinc-coated for 240 h salt spray protection acc. to ISO 9227. Enhanced surface protection for mobile sector available for the valve housing and steel parts (ISO 9227, 520 h salt spray)

ISO 4401-05-04-0-05

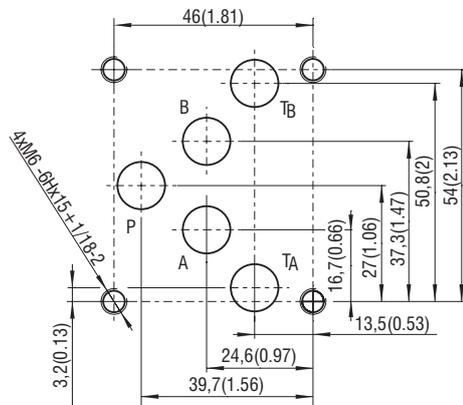

**Functional Description**

The 3-way pressure compensator, built in a modular block, maintains a constant pressure drop on the flow control valve and thus a constant volumetric flow independent of actuator load changes or pump power fluctuation. The spool position of the compensator is controlled by pressure drop sensed upstream and downstream from the valve. The set pressure drop is defined by spring pressure acting on the spool face and is maintained by releasing excess flow back to the tank. In the basic position the compensator is closed. The volumetric flow, and thus the moving velocity of piston rod or hydraulic motor shaft can be regulated by change of flow cross section on the flow control valve or by change of the set pressure drop on the pressure compensator with the adjusting screw. The three-way pressure compensator is connected parallel to the flow control valve. It maintains a constant pressure drop on the valve by dividing the flow from the pump. When the actuator is stopped, the pressure compensator opens and allows full fluid flow from the pump to the tank at low pressure losses. It takes over the function of unloading valve and protects the circuit against overheating. The three-way pressure compensator is very often used for system pressure regulation depending on the load (LS-regulation) in the circuits with a constant displacement pump.


**Technical Data**

Valve size	10 (D05)	
Max. operating pressure	bar (PSI)	350 (5100)
Max. flow	l/min (GPM)	80 (21.1)
Control pressure differential	bar (PSI)	4 ... 14 (58 ... 203)
Fluid temperature range (NBR)	°C (°F)	-30 ... +100 (-22 ... +212)
Fluid temperature range (FPM)	°C (°F)	-20 ... +120 (-4 ... +248)
Weight (all models)	kg (lbs)	1.0 (2.2)
	Datasheet	Type
General information	HA 0060	Products and operating conditions
Mounting interface	HA 0019	Size 10
Spare parts	HA 8010	

**Characteristics** measured at  $v = 32 \text{ mm}^2/\text{s}$  (156 SUS)

**Regulated flow related to input pressure**

TV2-103/MC Meter-in compensator

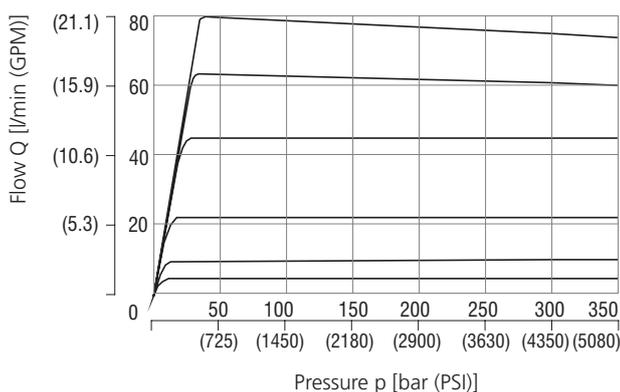

The characteristic of the pressure compensator corresponds to the flow rate of a PRM2-103Z11/60 proportional directional valve.

If the pressure resistance increases due to a flow rate increase, the pressure differential also has to increase in order to ensure correct regulation.

