


Pressure Relief Valve, Spool Type, Pilot Operated, External Pilot and Drain

**VPN1-06/S**

M22 x 1,5 • Q<sub>max</sub> 70 l/min (18.5 GPM) • p<sub>max</sub> 320 bar (4600 PSI)

Model S

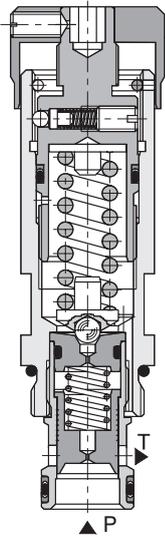

Technical Features


- › Excellent stability throughout flow range with rapid response to dynamic pressure changes
- › Low hysteresis, accurate pressure control and low pressure drop
- › Wide pressure range up to 320 bar
- › High flow capacity
- › Hardened precision parts
- › Ideal for use as control valve where accuracy and repeatability is required
- › External pilot and drain option
- › Adjustable by allen key or hand screw, optionally sealable (lockwire holes)
- › In the standard version, the valve is zinc-coated for 240 h protection acc. to ISO 9227. Enhanced surface protection for mobile sector available for the steel parts (ISO 9227, 520 h salt spray)

Functional Description

A pilot operated, spool type hydraulic relief valve in the form of a screw-in cartridge intended for use as a pressure limiting device. Fast-acting with low hysteresis. Because of the absence of any internal seals, the valve shows excellent reseating and repeatability characteristics. It may be used as a main pressure control element but due to its two stage design it is not recommended for safety applications where operating speed is critical. Version SX has an external pilot line, version SY allows a separate drain connection.

Model	S	SX	SY
Symbol			

Model SX (SY)

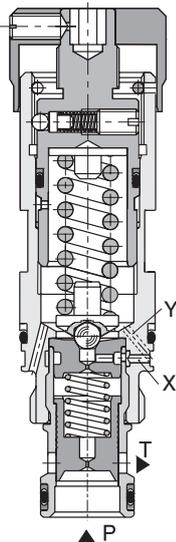


Technical Data

Valve size / Cartridge cavity		M22 x 1,5 / QG2	M22 x 1,5 / QF2
Model		S	SX, SY
Max. flow	l/min (GPM)	70 (18.5)	
Max. operating pressure	bar (PSI)	320 (4600)	
Fluid temperature range (NBR)	°C (°F)	-30 ... +100 (-22 ... 212)	
Fluid temperature range (FPM)	°C (°F)	-20 ... +120 (-4 ... 248)	
Weight	kg (lbs)	0.25 (0.55)	
	Datasheet	Type	
General information	HA 0060	Products and operating conditions	
Valve bodies	In-line mounted	HA 0018	SB-QG2*
	Sandwich mounted	HA 0028	SB-*QG2*
Cavity details	HA 0019	SMT-QG2*	SMT-QF2*
Spare parts	HA 8010		

Characteristics measured at v = 32 mm<sup>2</sup>/s (156 SUS)

Relief pressure related to flow rate


Model S, SX

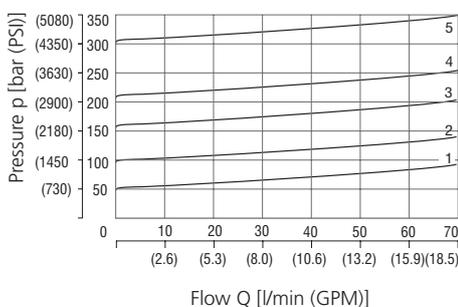

	Pressure range
5	32
4	21
3	16
2	10
1	6

Relief pressure related to flow rate


Model SY

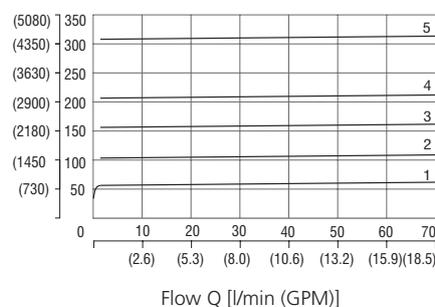

	Pressure range
5	32
4	21
3	16
2	10
1	6

Minimum set and circulation pressure


Model S, SX, SY

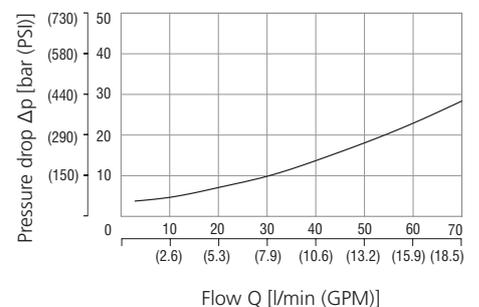


Dimensions in millimeters (inches)

VPN1-06/S


Model S

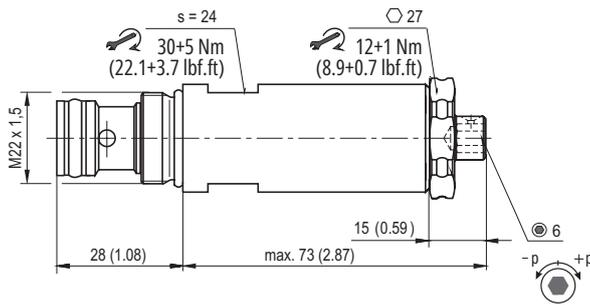


Model RS



Model RP




Model L




VPN1-06/SX (SY)


Model S

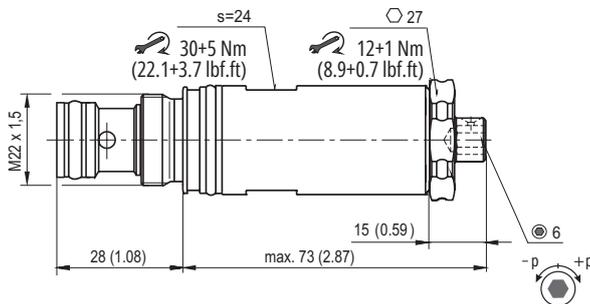


Model RS



Model RP



Model L



Ordering Code

VPN1-06 / [ ] - [ ] [ ] [ ] - [ ]

Pressure relief valve, spool type,  
pilot operated,  
external pilot and drain M22 x 1,5

**Model**  
internal pilot and drain  
external pilot, internal drain  
internal pilot, external drain

**Pressure range**  
up to 63 bar (910 PSI)  
up to 100 bar (1450 PSI)  
up to 160 bar (2320 PSI)  
up to 210 bar (3050 PSI)  
up to 320 bar (4640 PSI)

S  
SX  
SY

6  
10  
16  
21  
32

No designation  
V

S  
RS  
RP  
L

**Surface treatment**  
A zinc-coated (ZnCr-3), ISO 9227 (240 h)  
B zinc-coated (ZnNi), ISO 9227 (520 h)

**Seals**  
NBR  
FPM (Viton)

**Adjustment option**  
allen key (hex. 6), without protective cap  
hand screw, metal  
hand screw, plastic  
allen key (hex. 6), with protective cap, sealable  
(lockwire holes)